

HSF

NOTES:

Rated Current: 7.0A

Contact Resistance: 20mΩ max

Withstand Voltage: AC 1500V

Insulation Resistance: 1000MΩ/DC 500V

Operation Temperature: -40℃ to +105℃

Contact Material: Brass

Contact plating: Sn Over Ni

Insulator Material: PA66 UL94V-0

Ordering Information

WF4141 - 1 WR XX W 0 2

No. of Row
Single Row



Right Angle Type

No. of pins
02=02PIN
03=03PIN


Wcon Internal Code

Package
0=PE bag





Colour
W=White




2PIN

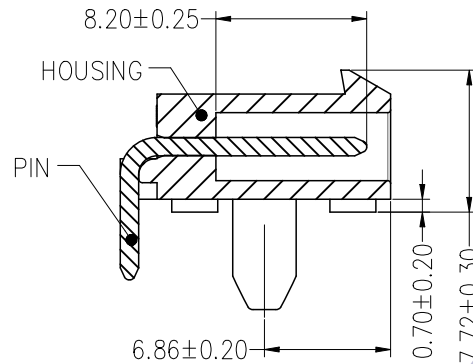

SEC A-A

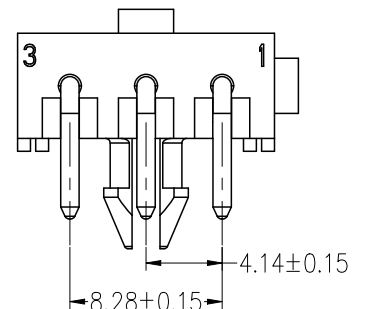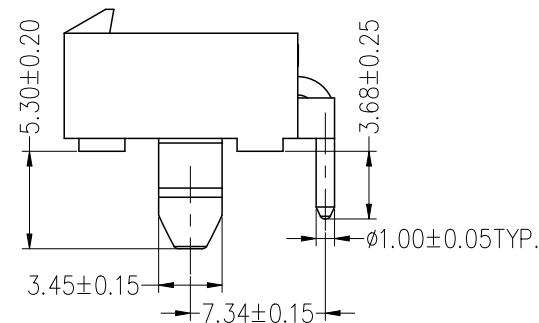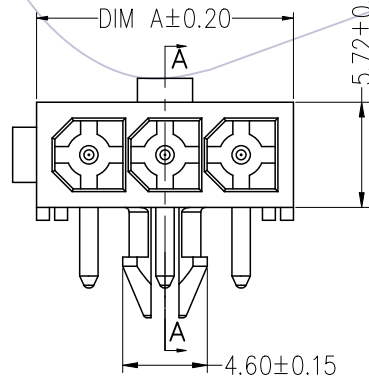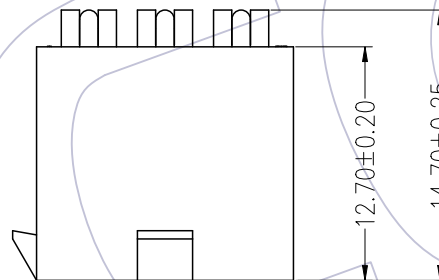

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05,T=1.57mm)

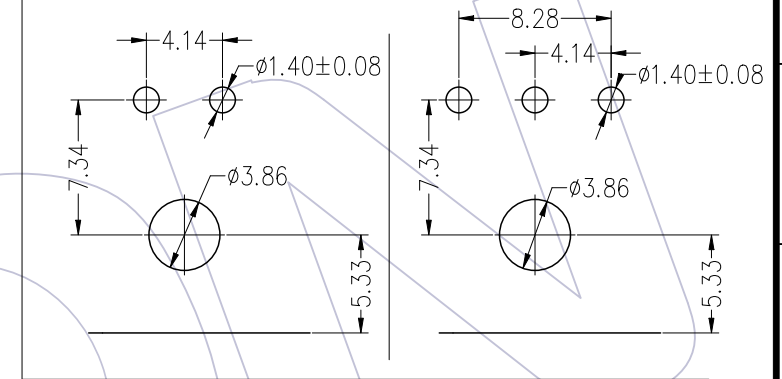

Specification & Ordering Information:

Circuit	Part No.	Dimension
		A
02	WF4141-1WR02W02	9.83
03	WF4141-1WR03W02	13.97

				OPERATION		DRAW Morris	DATE 2022/11/17	SCALE UNIT mm	FIT A4	PART NO. WF4141-1WRXXW02	WCON Http: www.wcon.com	
				X.X	±0.30							
				X.XX	±0.25	CHECK	DATE	SIZE A4	SHEET 1/1	TITLE: 4.14mm Wafer, "T" Type, Single Row, R/A, W/T Post	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	
				X.XXX	±0.15							
				Angle	±3°	APPROVE	DATE	PROJ.	Customer NO.		WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
				DIM	TOL							
A0	2022/11/17	NEW		---								
REV	DATE	MODIFICATION DESCRIPTION		CHANGE								